


COUPLERS



PART#	DESCRIPTION	STYLE
01-11200	Coupler, Class I, 1-7/8" Ball, 2" Channel, 2000 lbs. - Zinc	A
01-11250	Coupler, Class I, 1-7/8" Ball, 2-1/2" Channel, 2000 lbs. - Zinc	A
01-11300	Coupler, Class I, 1-7/8" Ball, 3" Channel, 2000 lbs. - Zinc	A
01-22200	Coupler, Ball Size 2", 2" Tongue Mount Width, Straight Channel, Zinc Finish, Rating 3,500 lbs.	B
01-22250	Coupler, Ball Size 2", 2-1/2" Tongue Mount Width, Straight Channel, Zinc Finish, Rating 3,500 lbs.	B
01-22300	Coupler, Ball Size 2", 3" Tongue Mount Width, Straight Channel, Zinc Finish, Rating 3,500 lbs.	B
01-34300	Fulton Coupler, 2" Ball, 5,000 lb Capacity	C
01-33305	2" A-Frame Coupler 5,000 lb Capacity	D
01-CA5210B	2" A-Frame Coupler 8,000 lb Capacity	E
01-44305	2-5/16" A-Frame Coupler 10,000 lb Capacity	F
01-CA5400	2-5/16" A-Frame Coupler 14,000 lb Capacity, Oily Finish	F
01-A200S0303	2" Adjustable Coupler, 8,000 lb Capacity	G
01-A256S0303	2-5/16" Adjustable Coupler, 14,000 lb Capacity	G
01-17500	Titan Coupler, 2-5/16" Ball, 20,000 lb Capacity, Weld-On	J
01-0091562	Heavy-Duty 2-5/16" Cast Coupler w/3" Channel, Zinc & Clear Chromate Finish, 15,000 lb Capacity	H
01-0090108	2-5/16" Coupler Welded to 4-Hole Mounting Plate, 12,000 lb Capacity	I

SAFETY CHAINS WITH CLEVIS HOOKS

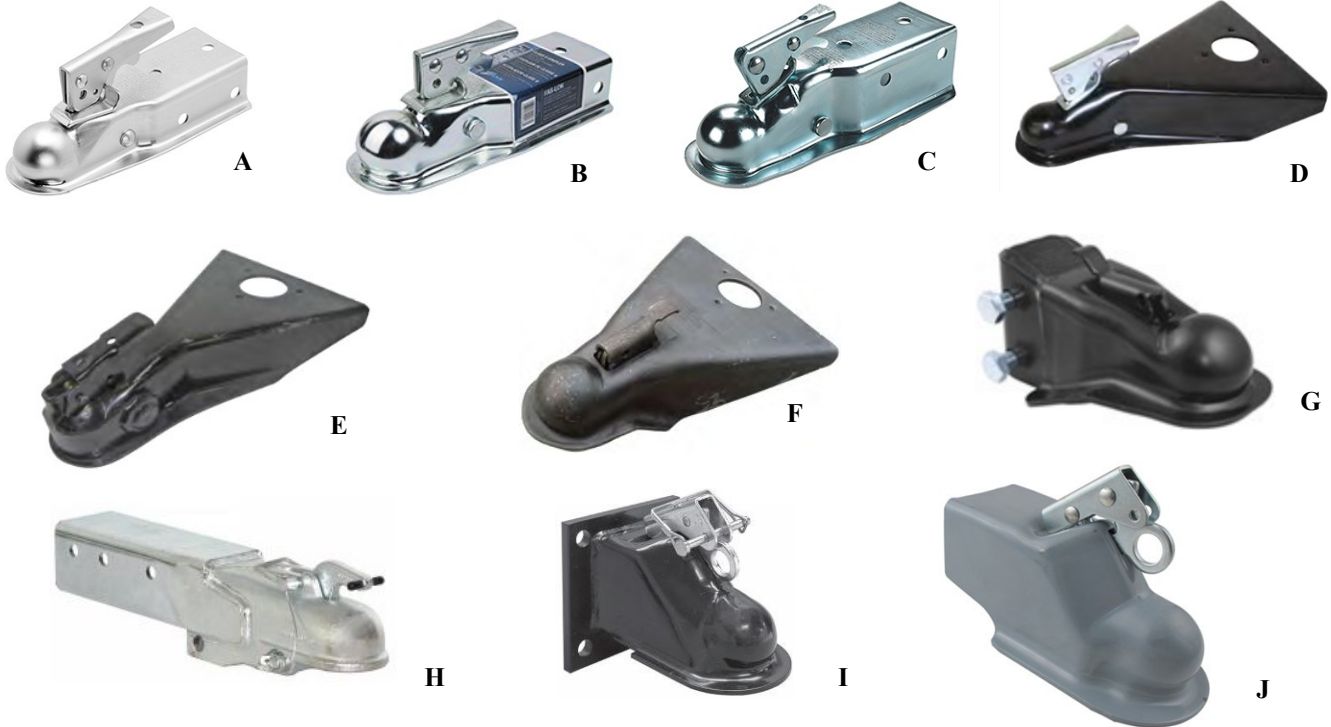

**Each chain must meet trailer GVWR*

PART#	MINMUM BREAK FORCE	TOTAL LENGTH	DESCRIPTION
02-80302	7,800 lbs*	35"	1/4" x 32" grade 43 plus (1) 1/4" hook
02-80304	18,800 lbs*	35"	5/16" x 32" grade 70 plus (1) 5/16" hook
02-80314	11,700 lbs*	35"	5/16" x 32" grade 43 plus (1) 5/16" hook
02-BSC3835	16,200 lbs*	35"	3/8" x 31" grade 43 plus (1) 3/8" hook
02-80316	24,000 lbs*	35"	3/8" x 31" grade 70 plus (1) 3/8" hook

SAFETY CHAIN WITH LATCH S-HOOKS



PART#	MINMUM BREAK FORCE	TOTAL LENGTH	DESCRIPTION
02-80312	2,000lbs	27"	3/16" x 24" grade 30 plus (1) 3/8" S-hook
02-80313	5,000 lbs	27"	1/4" x 24" grade 30 plus (1) 7/16" S-hook

SAFETY CHAIN WITH S-HOOKS



PART#	MINMUM BREAK FORCE	TOTAL LENGTH	DESCRIPTION
02-80010	2,000lbs	48"	3/16" x 41" grade 30 plus (2) 3/8" S-hook
02-80030	5,000 lbs	48"	1/4" x 40" grade 30 plus (2) 7/16" S-hook

CLEVIS HOOKS WITH SAFETY LATCH

- Heat treated, forged steel
- Meets requirements for high test chain

PART#	GRADE	GTW	OPENING SIZE	DESCRIPTION
02-81900	43	7,800 lbs	1/2"	1/4" safety hook with latch
02-81550	43	14,000 lbs	3/4"	5/16" safety hook with latch
02-81560	43	18,000 lbs	1"	3/8" safety hook with latch
02-81960	70	24,000 lbs	1"	3/8" safety hook with latch
02-81910	43	35,000 lbs	1 1/4 "	1/2" safety hook with latch



GRAB HOOKS

- Heat treated, forged steel
- Meets requirements for high test chain

PART#	WORKING LOAD LIMIT	GRADE	DESCRIPTION
02-81330	2,600 lbs	43	1/4" clevis grab hook
02-81340	3,900 lbs	43	5/16" clevis grab hook
02-81437	4,700 lbs	70	5/16" clevis grab hook
02-81350	5,400 lbs	43	3/8" clevis grab hook
02-81438	6,600 lbs	70	3/8" clevis grab hook



S-HOOKS WITH SAFETY LATCH

- Hooks must meet or exceed maximum GTW of your trailer
- Durable zinc finish

PART#	SAE CLASS	GTW	DESCRIPTION
02-2	Not for Towing	350 lbs	5/16" Safety Link
02-81266	1	2,000 lbs	3/8" S-hook with safety latch
02-81277	2	5,000 lbs	7/16" S-hook with safety latch



JACKS

PRO SERIES STANDARD ROUND JACKS A-FRAME WITHOUT FOOTPLATE

PART#	CAPACITY	LIFT	RETRACTED HEIGHT	EXTENDED HEIGHT	CLEARANCE	TYPE OF WIND
45-TJA2000	2,000 lbs	10"	8"	22.00"	11.00"	TOP
45-TJA2000LB (Low Bracket)	2,000 lbs	15"	5.5"	20.50"	16.00"	TOP
45-TJA2000S	2,000 lbs	14"	9"	23.00"	13.00"	SIDE
45-TJA5000	5,000 lbs	15"	10.80"	25.80"	14.55"	TOP



PRO SERIES STANDARD ROUND JACKS TUBULAR SWIVEL, WELD-ON WITH FOOTPLATE

PART#	CAPACITY	LIFT	RETRACTED HEIGHT	EXTENDED HEIGHT	CLEARANCE	TYPE OF WIND
45-TJP-2001P	2,000 lbs	10"	11.00"	21.00"	4.00"	TOP
45-TJP-2002P	2,000 lbs	15"	14.50"	29.50"	10.00"	TOP
45-TJP-2003P	2,000 lbs	10"	11.20"	21.20"	5.45"	SIDE
45-TJP-2004P	2,000 lbs	15"	14.40"	29.40"	12.25"	SIDE
45-TJP-5001P	5,000 lbs	10"	10.50"	20.50"	6.25"	SIDE
45-TJP-5002P	5,000 lbs	15"	15.50"	30.50"	6.25"	SIDE
45-TJP-5003P	5,000 lbs	10"	11.20"	21.20"	4.00"	TOP
45-TJP-5004P	5,000 lbs	15"	14.70"	29.70"	10.00"	TOP



PRO SERIES STANDARD ROUND JACKS RETAINING RING SWIVEL, WELD-ON WITH FOOTPLATE



PART#	CAPACITY	LIFT	RETRACTED HEIGHT	EXTENDED HEIGHT	CLEARANCE	TYPE OF WIND
45-TJB-2001B	2,000 lbs	10"	11.00"	21.00"	4.00"	Top
45-TJB-2005B*	2,000 lbs	10"	11.00"	21.00"	4.00"	Top
45-TJB-2002B	2,000 lbs	15"	14.50"	29.50"	10.00"	Top
45-TJB-2003B	2,000 lbs	10"	10.40"	20.40"	6.29"	Side
45-TJB-2004B	2,000 lbs	15"	14.40"	29.40"	12.25"	Side

**Same as TJB-2001B except has a bolt-on swivel bracket*

DROP LEG SQUARE JACKS (DIRECT WELD)



PART#	CAPACITY	LIFT	RETRACTED HEIGHT	EXTENDED HEIGHT	CLEARANCE	TYPE OF WIND	PIN LOCATION
45-19906	8,000 lbs	15"	25.20"	53.80"	N/A	Side	N/A
45-19907	8,000 lbs	15"	22.90"	51.50"	N/A	Top	N/A
45-TJD 12K SP R	12,000 lbs	12.5"	27.25"	53.25"	N/A	Side	RIGHT
45-TJD 12K SP FRONT	12,000 lbs	12.5"	28.25"	54.25"	N/A	Side	FRONT
45-182304	12,000 lbs	12.5"	23.4"	49.4"	N/A	Top	N/A

PRO SERIES SQUARE JACKS WELD-ON, TUBULAR SWIVEL

PART#	CAPACITY	LIFT	RETRACTED HEIGHT	EXTENDED HEIGHT	CLEARANCE	TYPE OF WIND
45-19908	8,000 lbs	10"	17.20"	27.20"	5.00"	Top



JACKS BOLT-ON



A



B



C



D




E

PART#	CAPACITY	LIFT	RETRACTED HEIGHT	EXTENDED HEIGHT	CLEARANCE	TYPE OF WIND	CASTER/ FOOTPLATE	STYLE
45-EJ1000	1,000 lbs	10"	13.0"	23.0"	11.0"	Side	Caster	A
45-MJ1500B	1,500 lbs	10"	13.0"	23.0"	11.0"	Side	Caster	B
45-XPD15L	1,500 lbs	12"	13.1"	25.1"	12.4"	Side	Dual-Caster	C
45-TJB-2005B	2,000 lbs	10"	11.0"	21.0"	4.0"	Top	Footplate	D
45-6100z	2,500 lbs	28"	7.0"	35.5"	19.25"	Side	Footplate	E

JACK ACCESSORIES & REPLACEMENT PARTS

Handles

PART#	DESCRIPTION	STYLE
46-0091263	Replacement Handle-Top Wind	A
46-018917	Top-Wind Handle Red Knob	B
46-015181	Handle 12,000 Jacks-side Fits 10K & 12K Jacks	C
46-0933301S00	Fulton Handle Kit, TJ 503	D
46-0933305S00	Fulton Handle Kit 1200-1500 lbs	E
46-25526	Handle, Atwood Side Wind	F
46-28296	Black Knob w/cap	A (Knob Only)
46-28297	Red Knob w/cap	B (Knob Only)

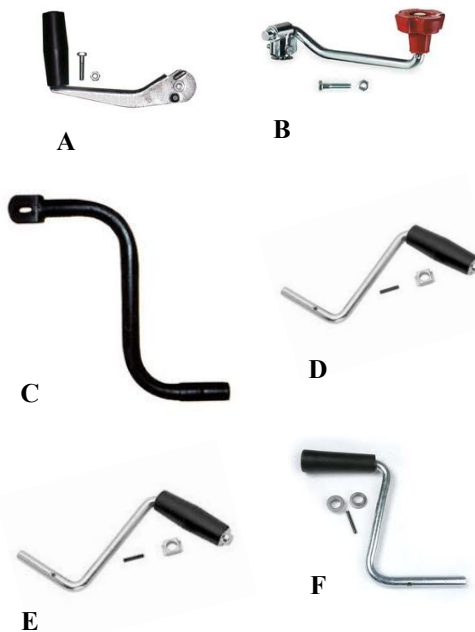

Foot/Casters

PART#	DESCRIPTION	STYLE
46-18309L	Foot Pad- 7" Tall	G
46-5703	Foot Pad	H
46-0933323S00	Replacement Wheel Kit 8"	I
46-6811	Replacement Wheel 6" x 2"	J
45-555	Caster Wheel Fits 2K & 5K A-Frame Jacks 6" Wheel	K



Stabilizer Jacks


PART#	DESCRIPTION	STYLE
45-82301	Atwood Swing Down Stabilizer Jack	L
45-SJ2 0324	Stabilizer, 1.75" Sq. x 28.75", Adjusts from 25" to 37" Stabilizer	M
45-SJ4 0324	Stabilizer, 1.75" Sq. x 20", Adjusts from 18" to 28" Stabilizer	M



JACK ACCESSORIES & REPLACEMENT PARTS (Continued)

Mounting Brackets/Pins

PART#	DESCRIPTION	STYLE
46-003135	A-Frame Bottom Bracket	A
46-015183	Bar Support Bracket (For 12K Jack)	N/S
46-015184	Coupling (For 12K Jack Handle Extension)	N/S
46-015904	Retaining Snap Ring	C
46-0933307S00	Plunger Kit 1/2" S-Mount	G
46-11	Bracket Kit for Jack	N/S
46-20969	A-Frame Flange	B
46-3005524	Pin Assembly for Drop-Leg	D
46-3005528	Mount Assembly, Tube Jack	F
46-500103	Plunger Pin Kit 3/8"	G
46-500178	Plunger Pin 1/2"	D
46-500231	Pull Pin 5/8" x 3 1/2"	E
46-500232	Pull Pin 5/8" x 4 1/4"	E
46-5000243	Pull Pin 9/16"	E
46-701472	Pull Pin 9/16"-For Square Jack	E
46-500239	Weld-On Male Mount	H
46-9197	Weld-On Male Mount for 9/16" Pin	H
46-9814	Weld-On Male Mount for 5/8" Pin	H
46-015279	Male Mount 5/8" H, 3" OD	H

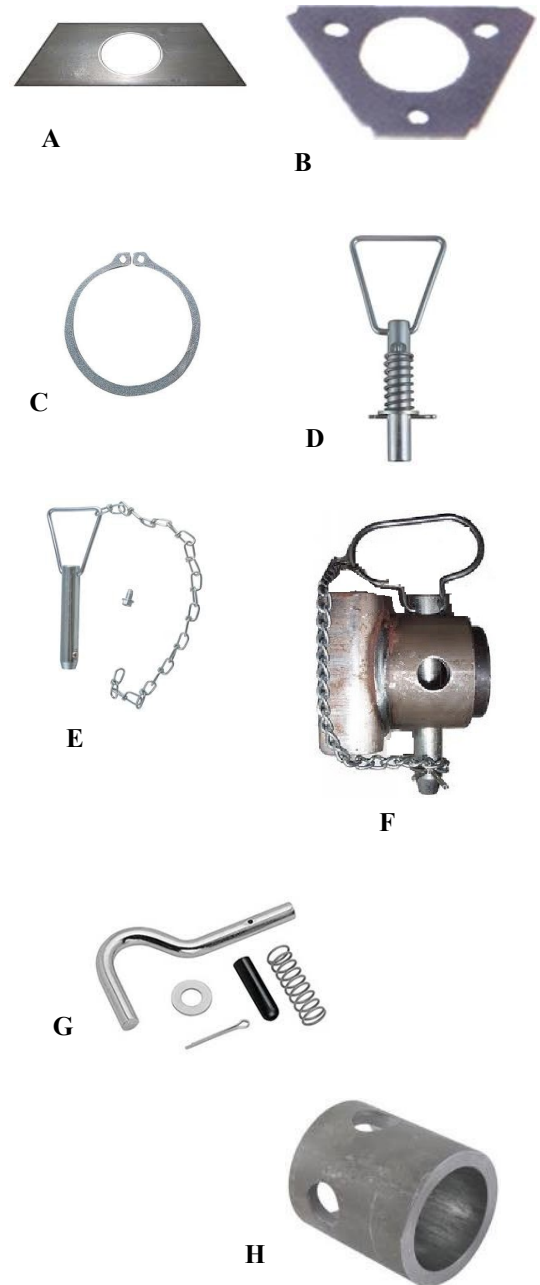


WINCHES



PART#	DESCRIPTION	CAPACITY	GEAR RATIO	CABLE CAPACITY	CABLE/STRAP/NOT INCLUDED	STYLE
05-KR1000	Brake Winch-Self Activating Automatic Brake	1,000 lbs	3.5:1	50 ft. 7/32" Diameter	Not Included	A
05-KR1500	Brake Winch-Self Activating Automatic Brake	1,500 lbs	5.1:1	50 ft. 7/32" Diameter	Not Included	A
05-HW800	Hand Winch	800 lbs	4.4:1	n/a	Strap	B
05-HW2000	Hand Winch	2,000 lbs	4.4:1 & 9.8:1	n/a	Strap	B
05-T1100	Single Speed Trailer Winch	1,100 lbs	4.4:1	n/a	Not Included	C
05-T1500Z	Single Speed Trailer Winch w/ Strap	1,500 lbs	4.4:1	n/a	Strap	D
05-T2005	Two Speed Trailer Winch	2,000 lbs	4.4:1 & 9.8:1	n/a	Not Included	E
05-T2605Z	Two Speed Trailer Winch	2,600 lbs	5.1:1 & 12.2:1	n/a	Strap	F
05-T32ZHD0301	Two Speed Trailer Winch	3,200 lbs	5.1:1 & 12.2:1	n/a	Strap	F

WINCH ACCESSORIES

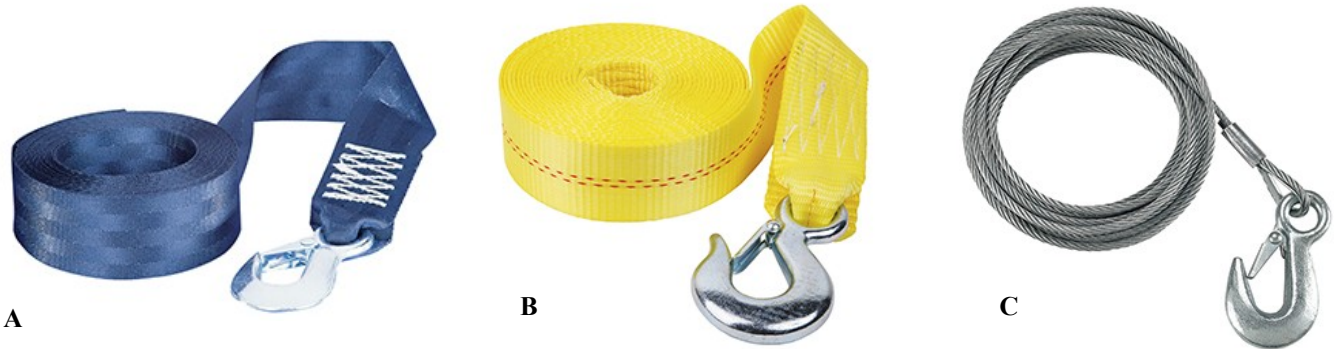

PART#	DESCRIPTION	STYLE
05-WS20	Winch Strap & Hook-Nylon web winch with hook, 2"x 20', 2,600 lb. maximum working load	A
05-WS12	Personal Watercraft Winch Strap with Hook & Loop-includes loop Nylon web winch strap with hook, 2"x 20',	A
05-WS20HD	Heavy Duty Winch Strap and Hook-2" x 20', 10,000 lb. minimum breaking strength, 4,000 lb. maximum working load	B
05-325	Winch Cable & Hook-3/16" x 25' galvanized cable, 4,200 lb. breaking strength	C
05-750	Winch Cable & Hook-7/32" x 50' galvanized cable, 5,600 lb. breaking strength	C